



UNMATCHED ELEGANCE AND STRENGTH

In this time and age, hygiene, cleanliness and comfort is a priority and everyone requires a place where they feel completely at home. The multifaceted surfaces of this collection make everyday life easier while achieving distinction in the decor segment for every home and public area. These surfaces with their convenient features offer an ideal tiling solution for a modern lifestyle.







MAINTENANCE



SOUND REDUCTION



DIMENSIONAL STABILITY



HYGIENIC SURFACE



WATER RESISTANT



FIRE RESISTANT




CHEMICAL RESISTANT



IMPACT RESISTANCE




THERMAL RESISTANCE

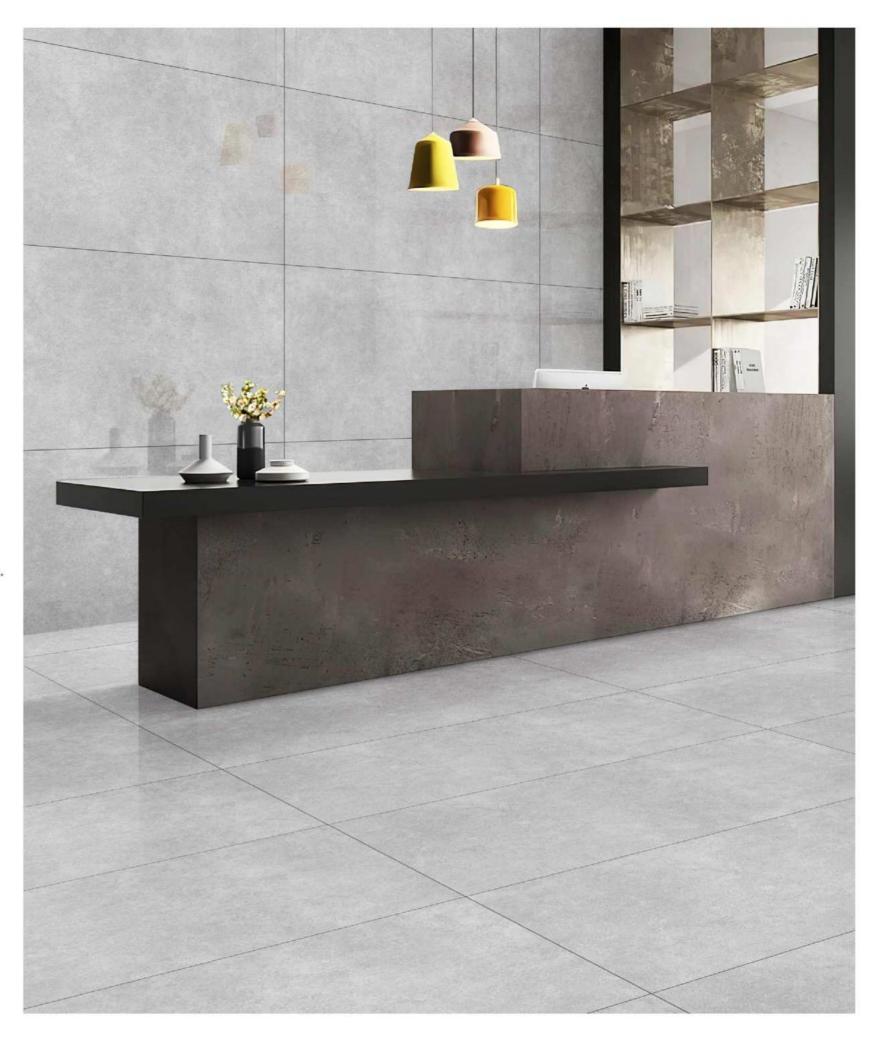

Index



SAND ALMOND

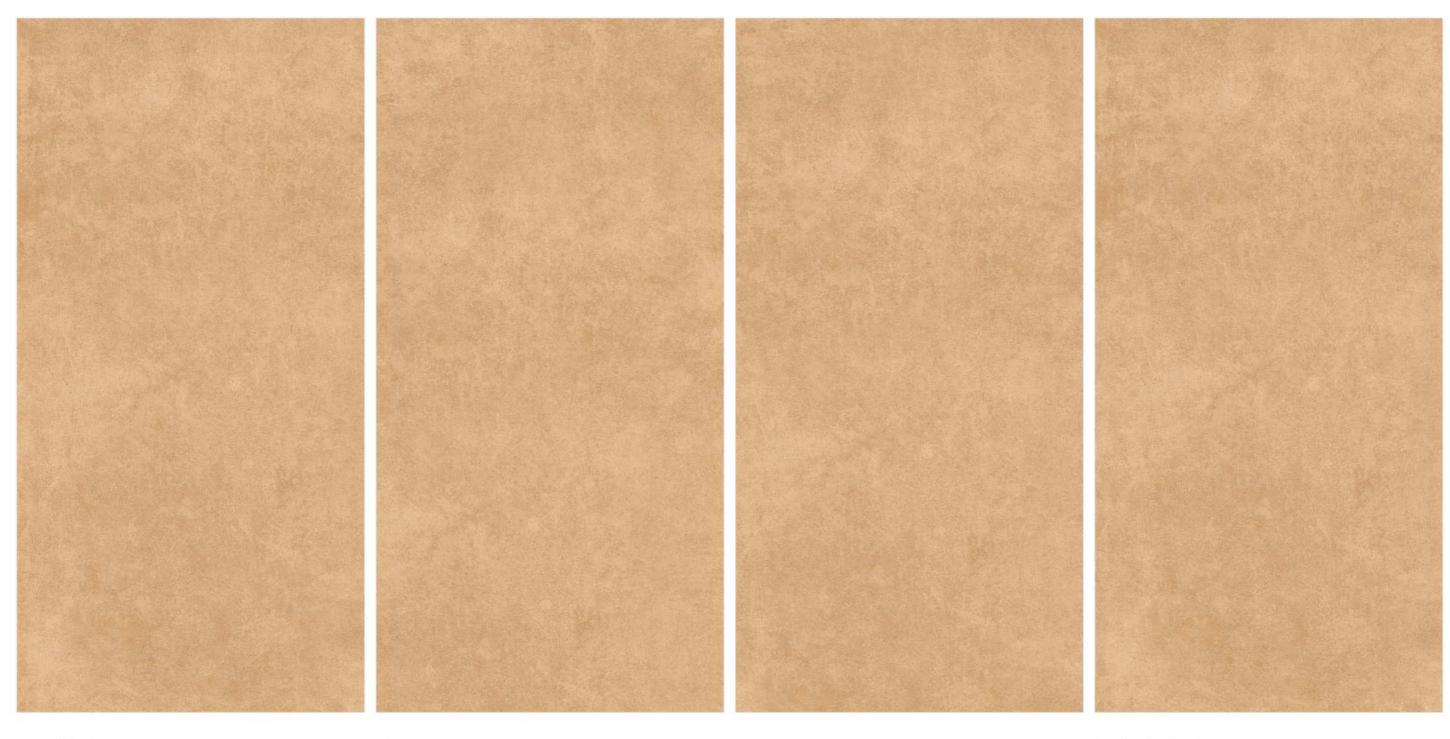


FINISH:-Glossy SIZE:-600X1200 MM





SAND AQUA

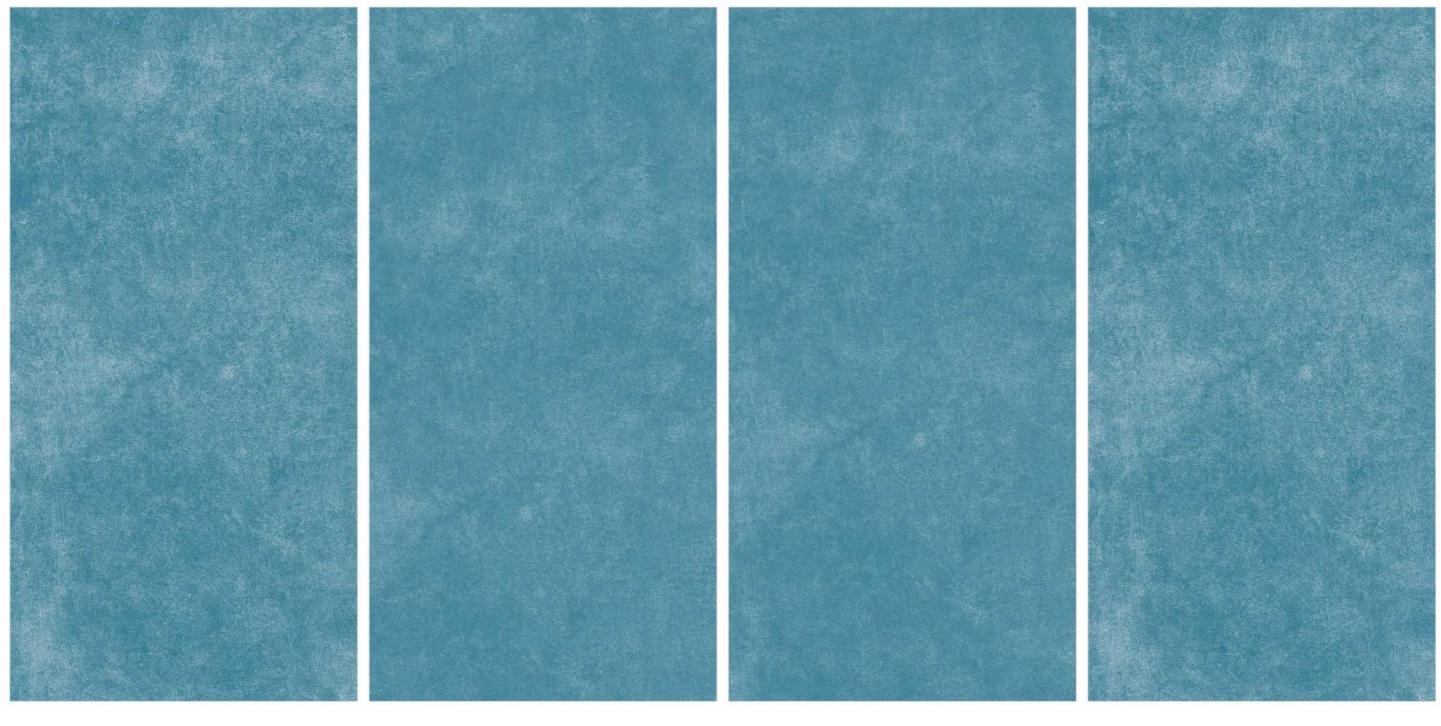


FINISH:-Glossy

SIZE:-600X1200 MM



RANDOM:-

SAND BIANCO

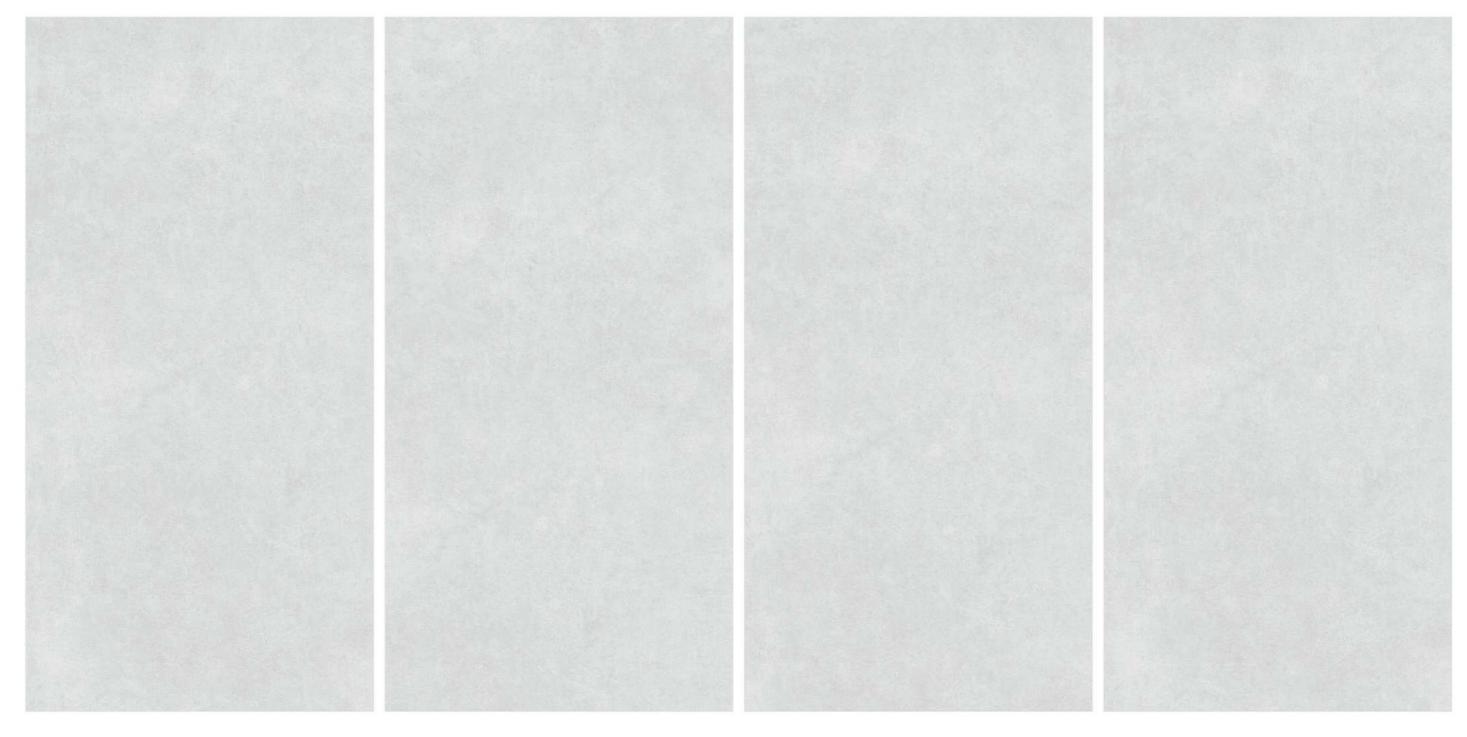


FINISH:-Glossy SIZE:-600X1200 MM





SAND BLUE

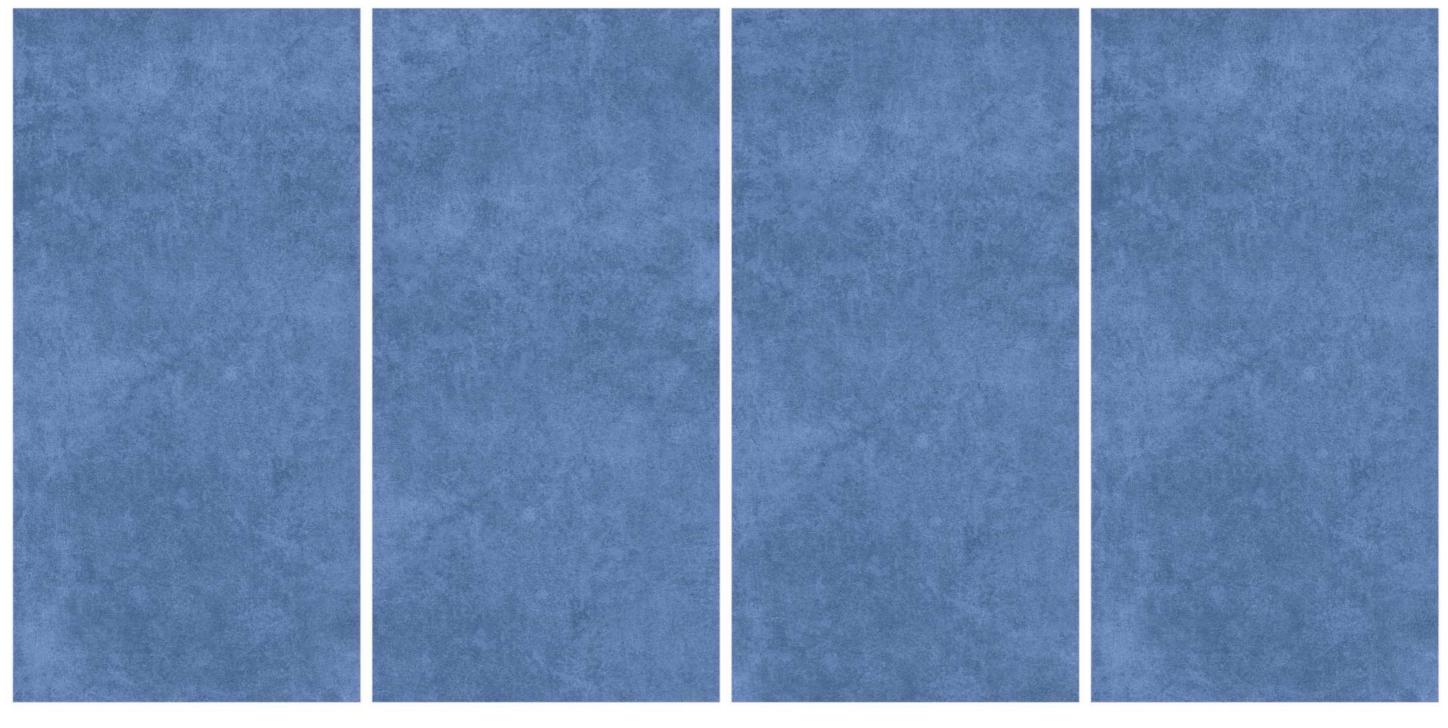


FINISH:-Glossy

SIZE:-600X1200 MM



RANDOM:-

SAND CARMEL

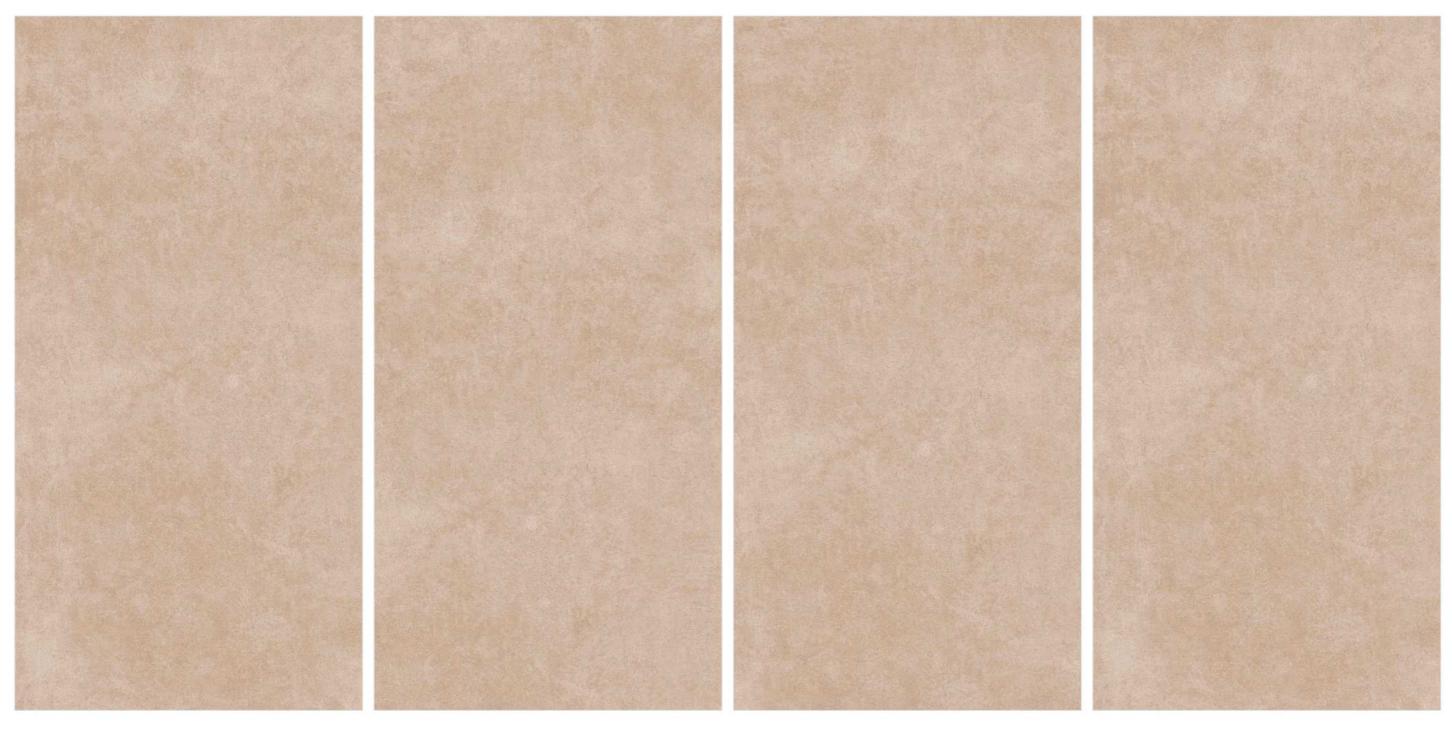


FINISH:-Glossy SIZE:-600X1200 MM






SAND CHERRY

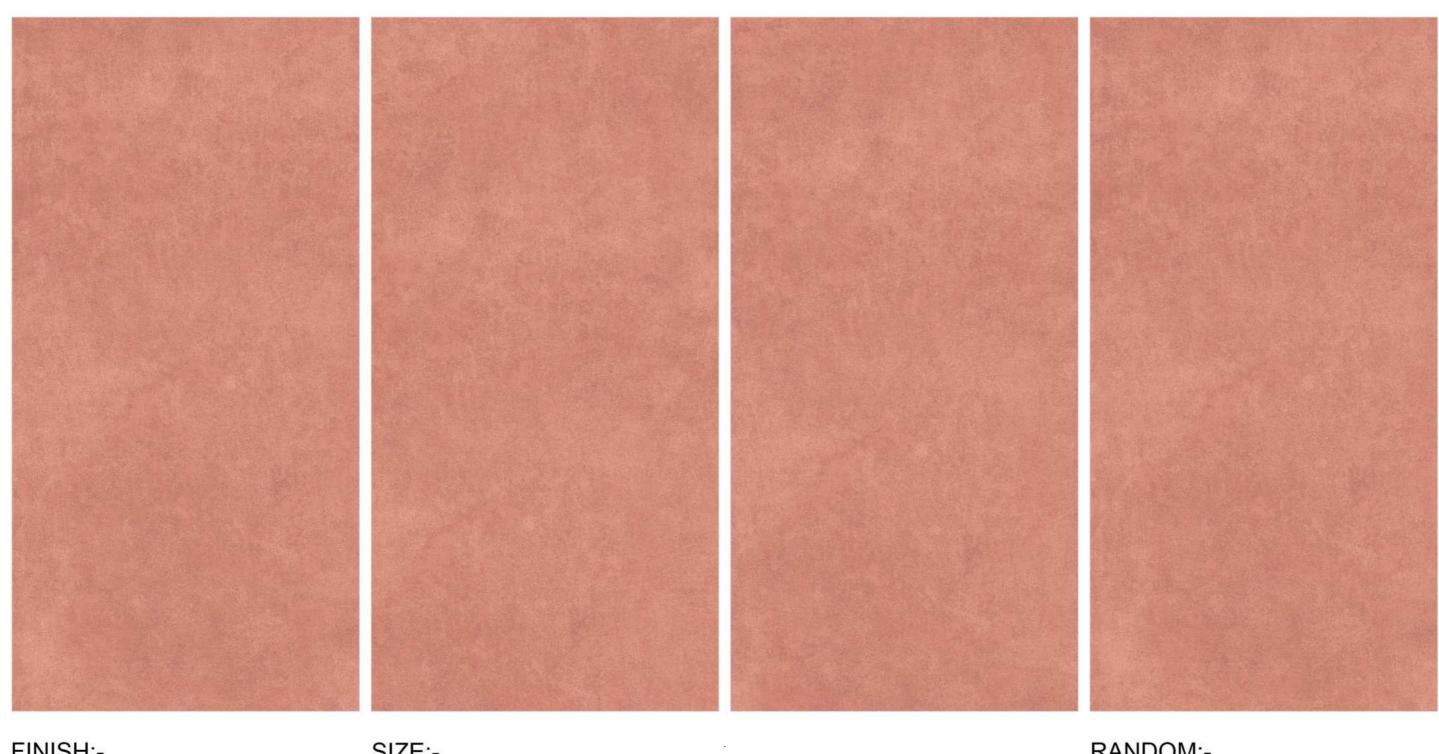

FINISH:-Glossy SIZE:-600X1200 MM



SAND CHOCO

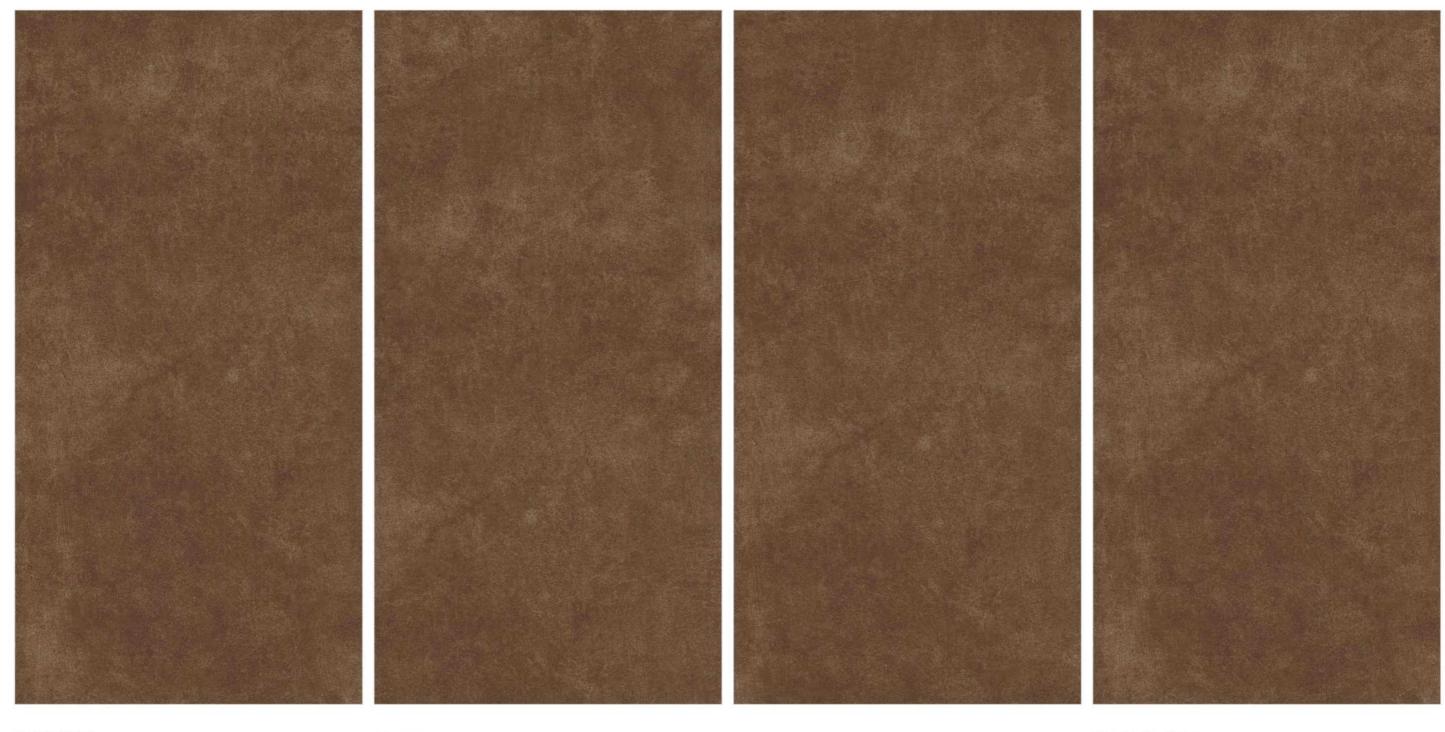

FINISH:-Glossy


SIZE:-600X1200 MM



RANDOM:-



SAND GREEN

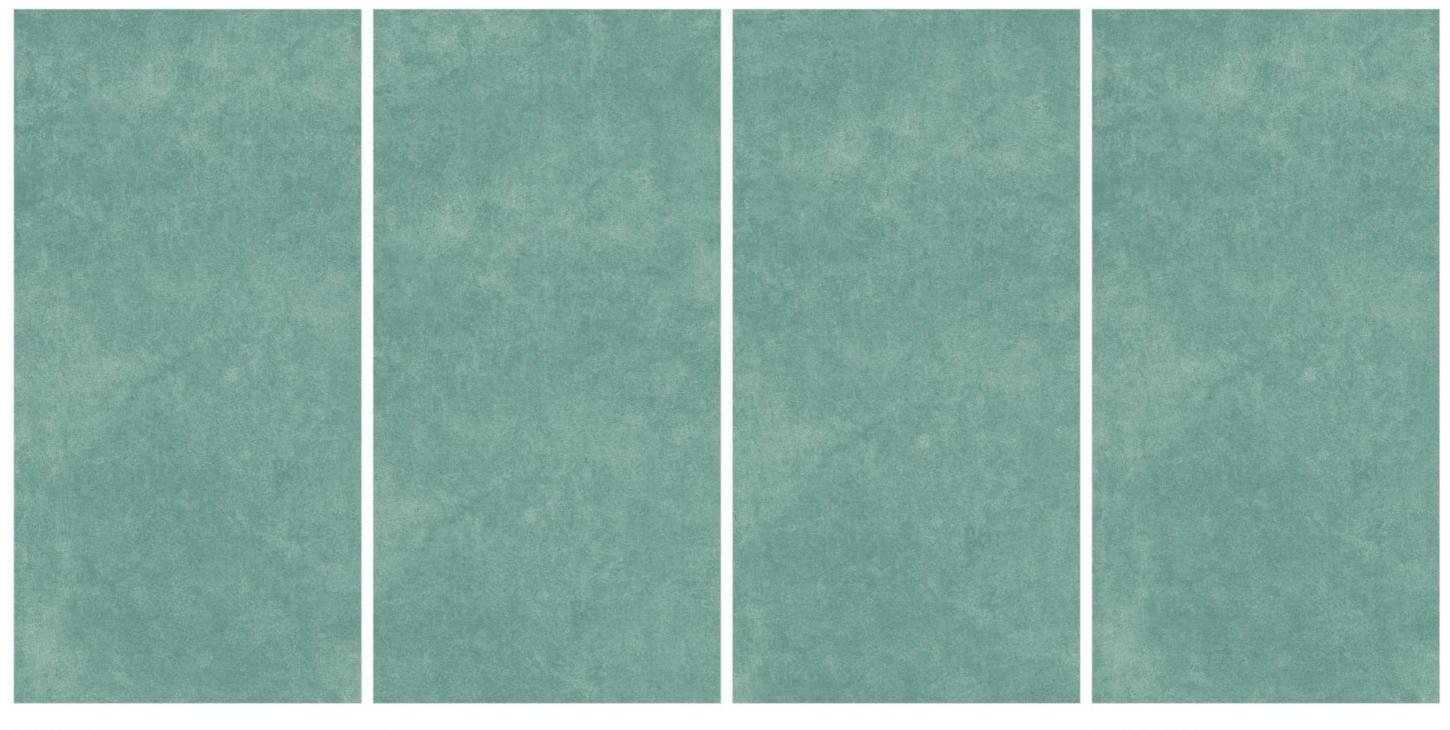


FINISH:-Glossy

SIZE:-600X1200 MM



RANDOM:-

SAND GREY

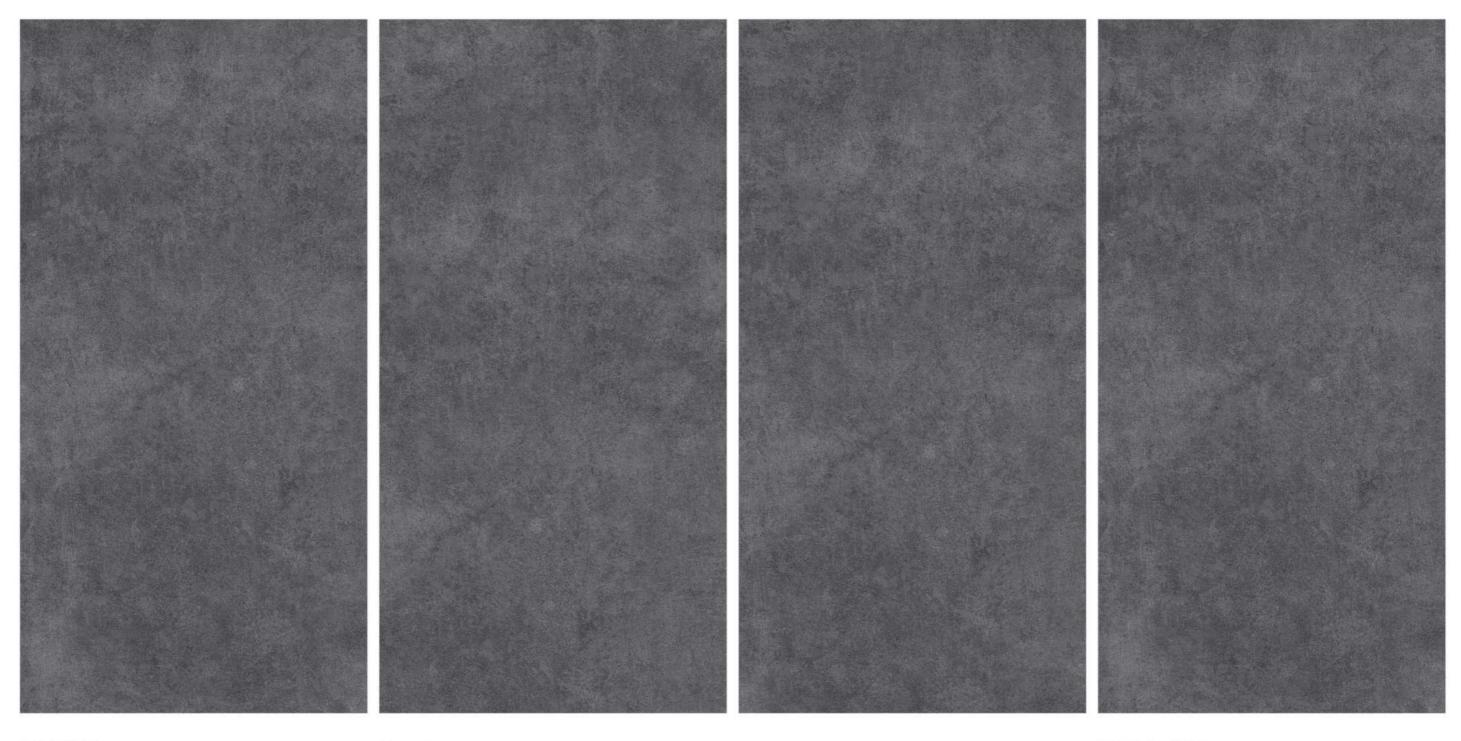

FINISH:-Glossy


SIZE:-600X1200 MM



RANDOM:-




SAND IVORY

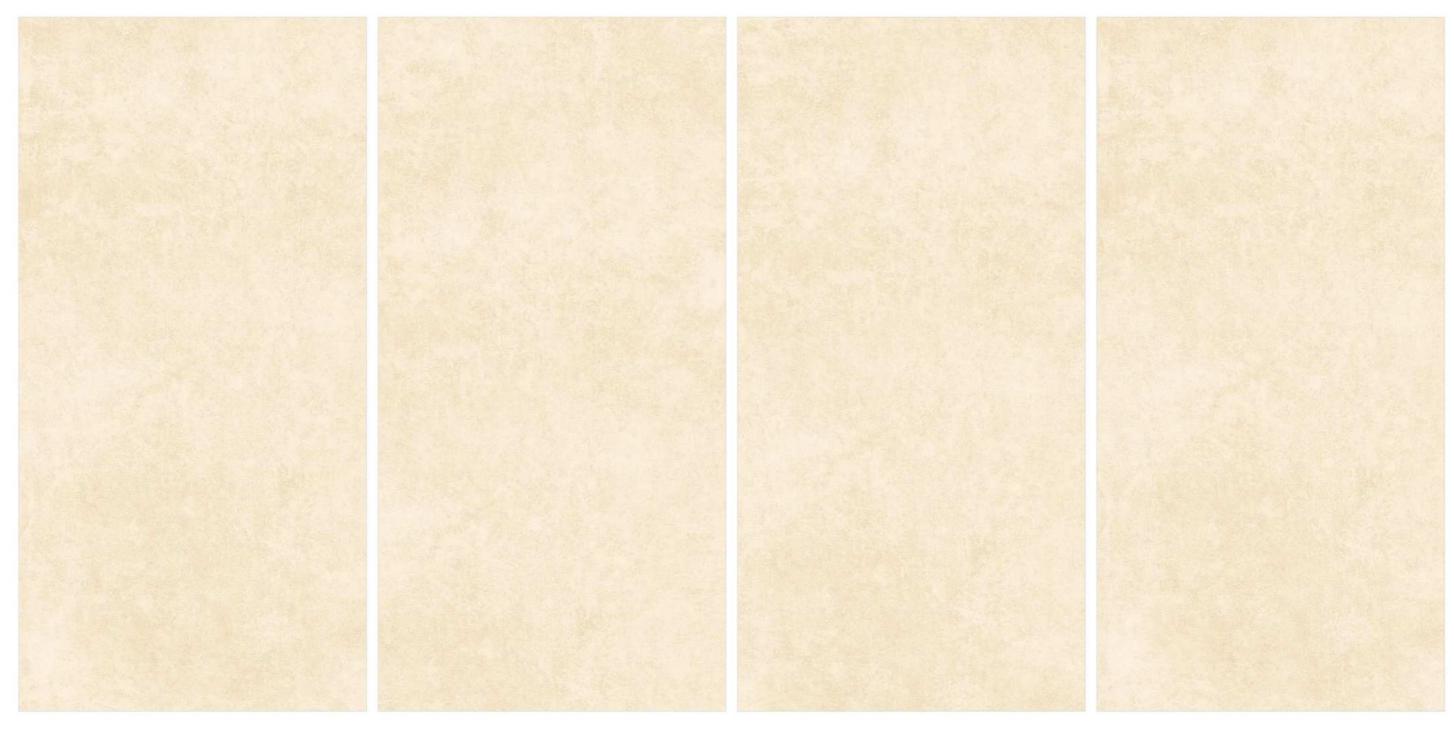

FINISH:-Glossy SIZE:-600X1200 MM



SAND LIME

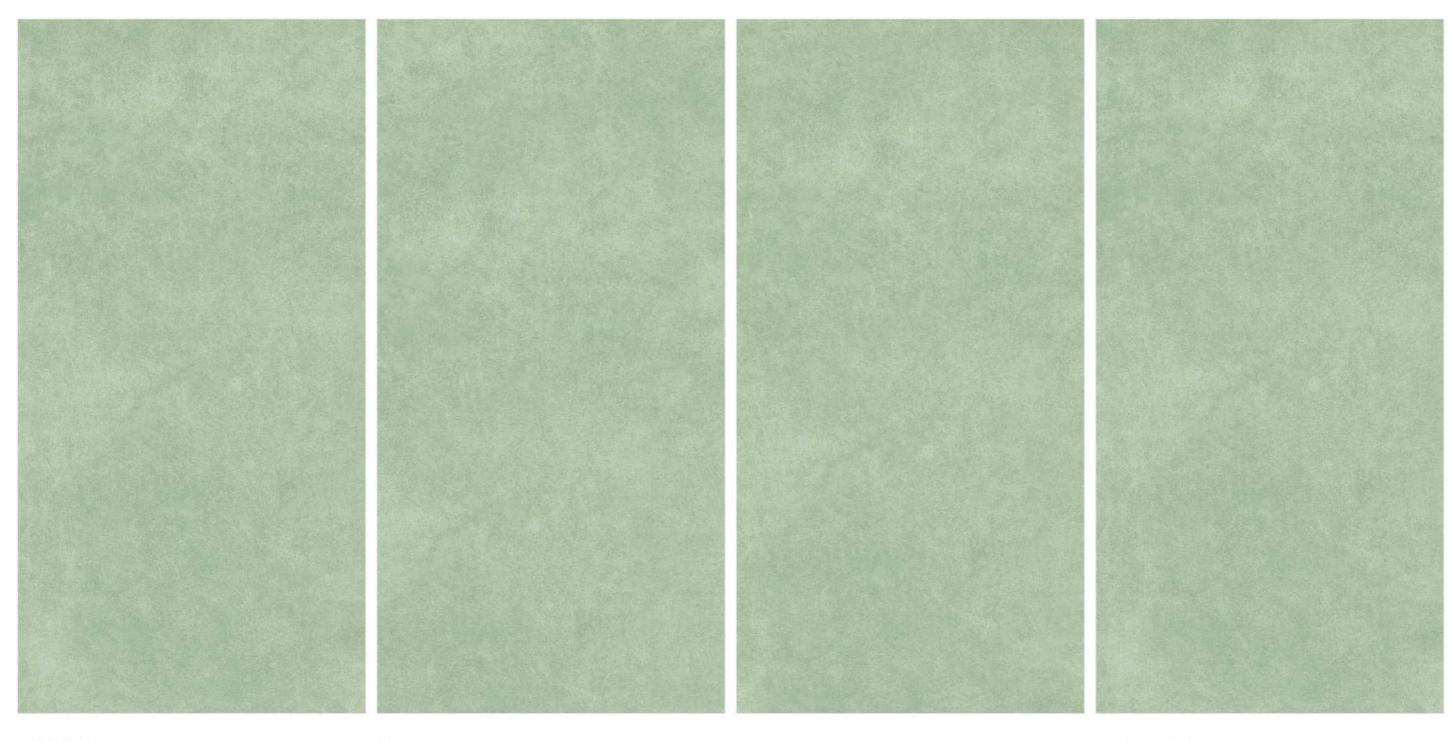


FINISH:-Glossy SIZE:-600X1200 MM





SAND PISTA

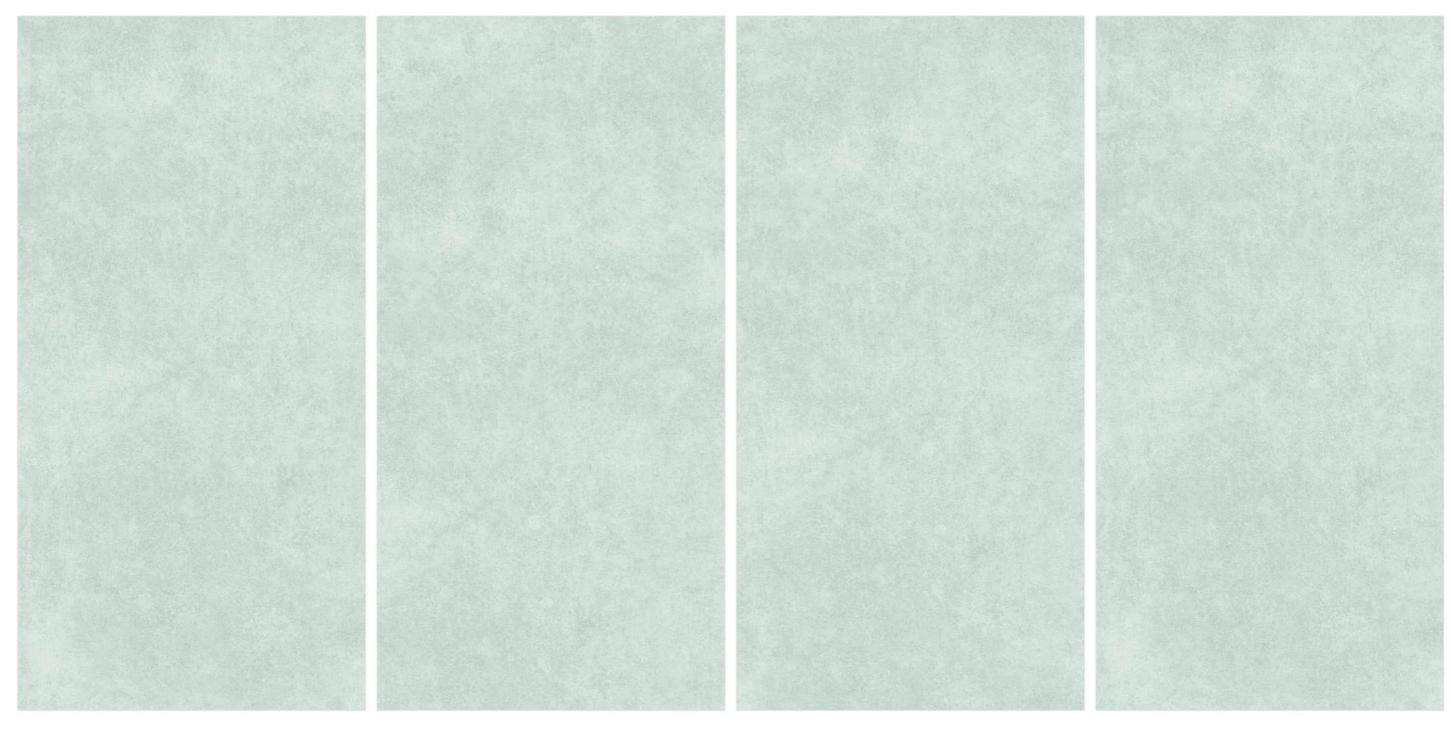

FINISH:-Glossy SIZE:-600X1200 MM




SAND ROSE



FINISH:-Glossy SIZE:-600X1200 MM




SAND SILVER

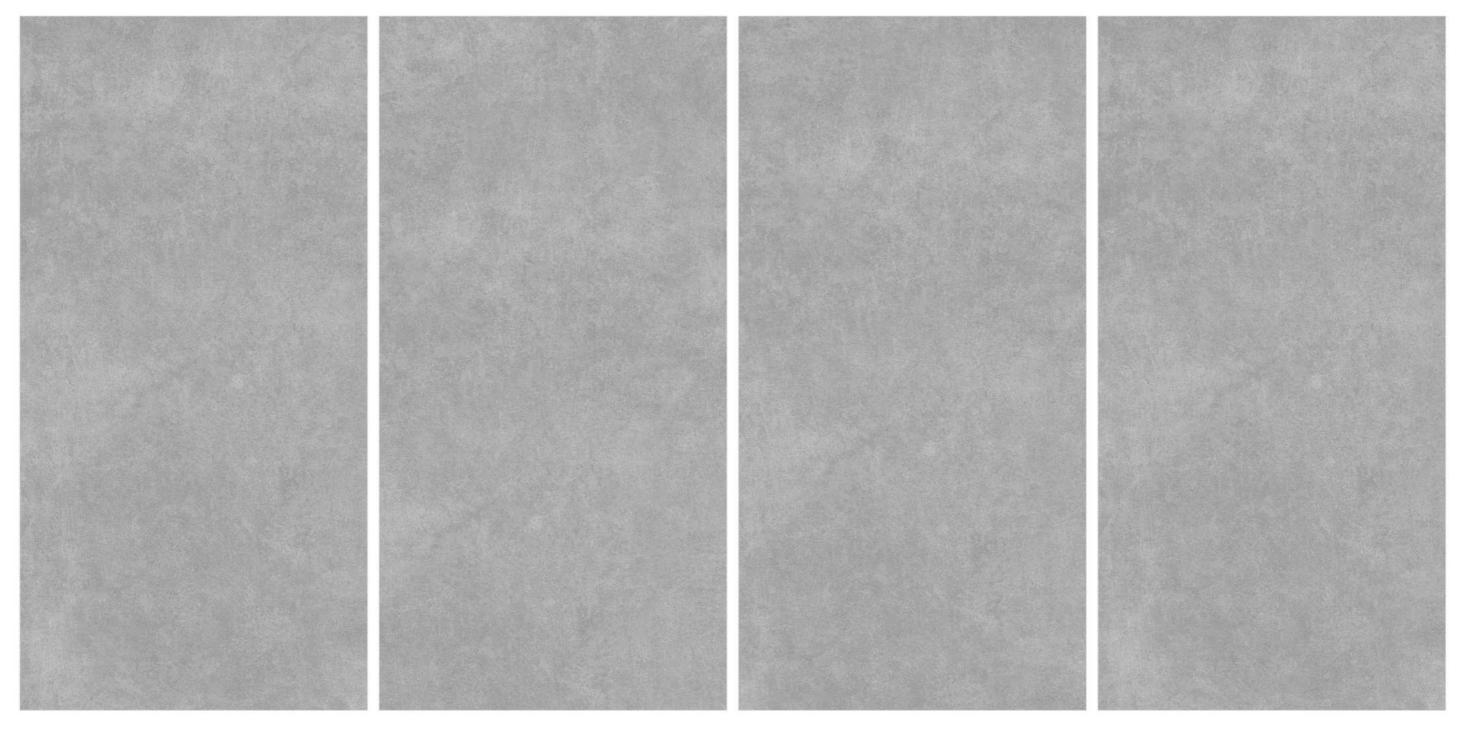


FINISH:-Glossy SIZE:-600X1200 MM



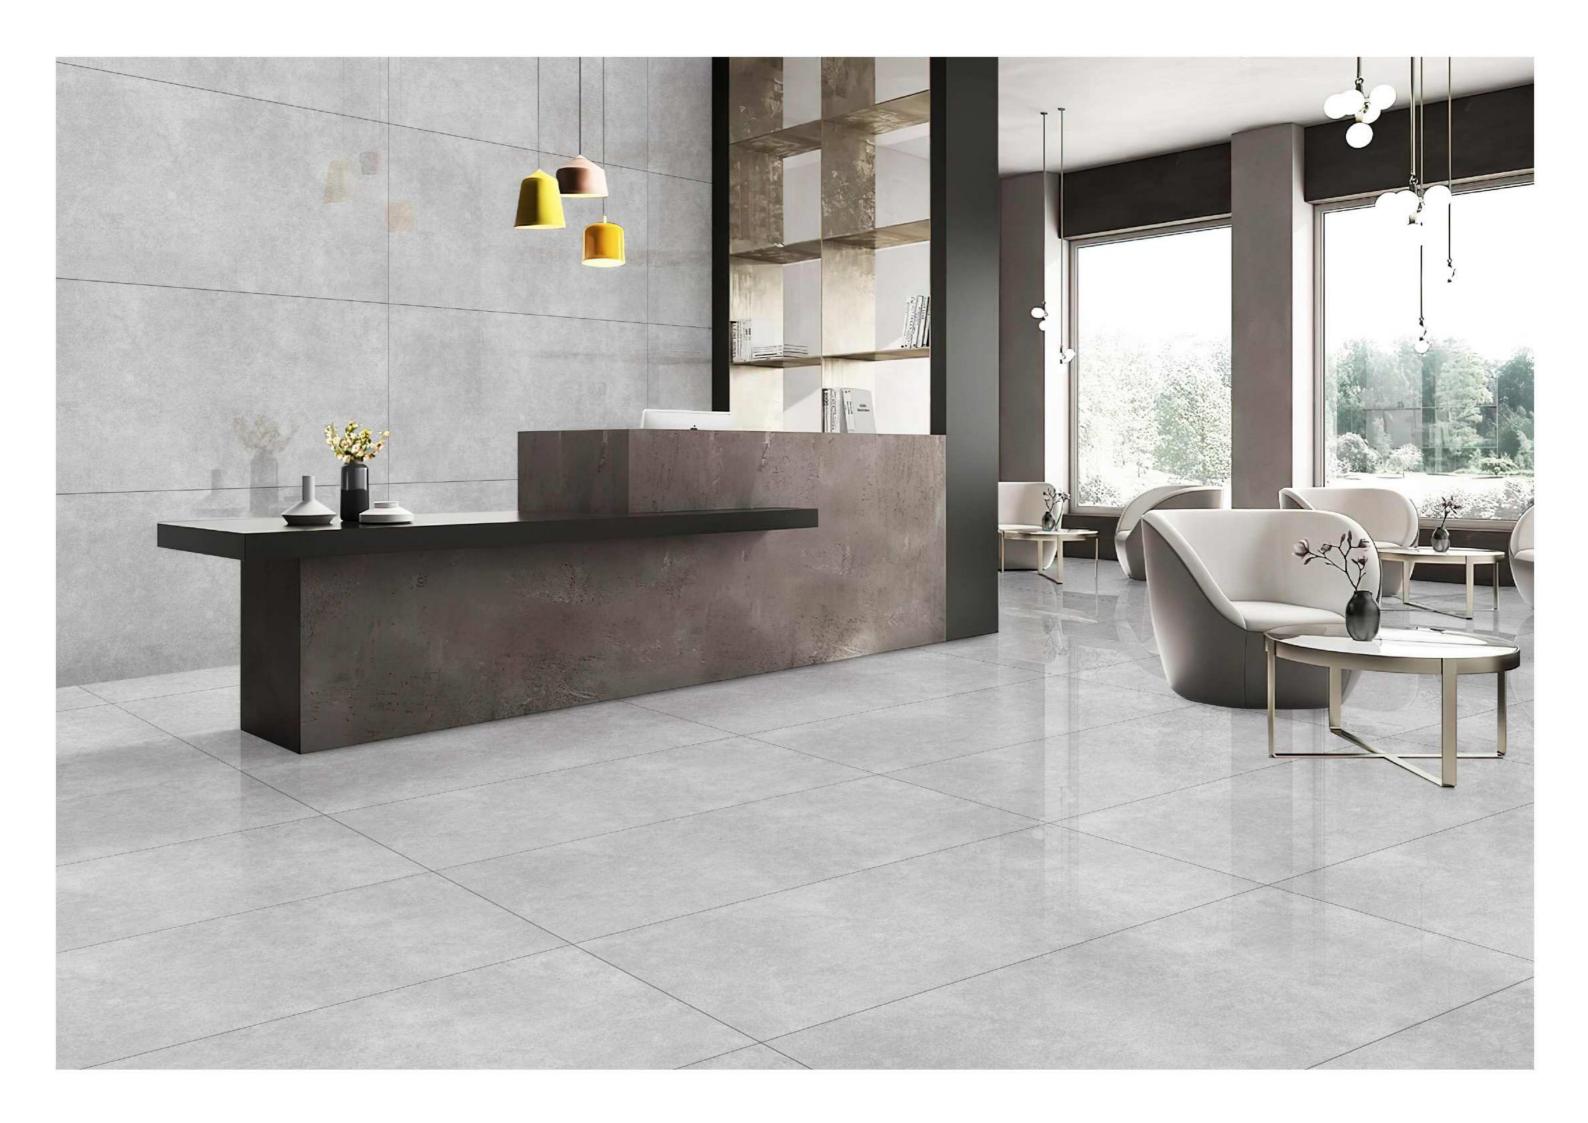


SAND SKY

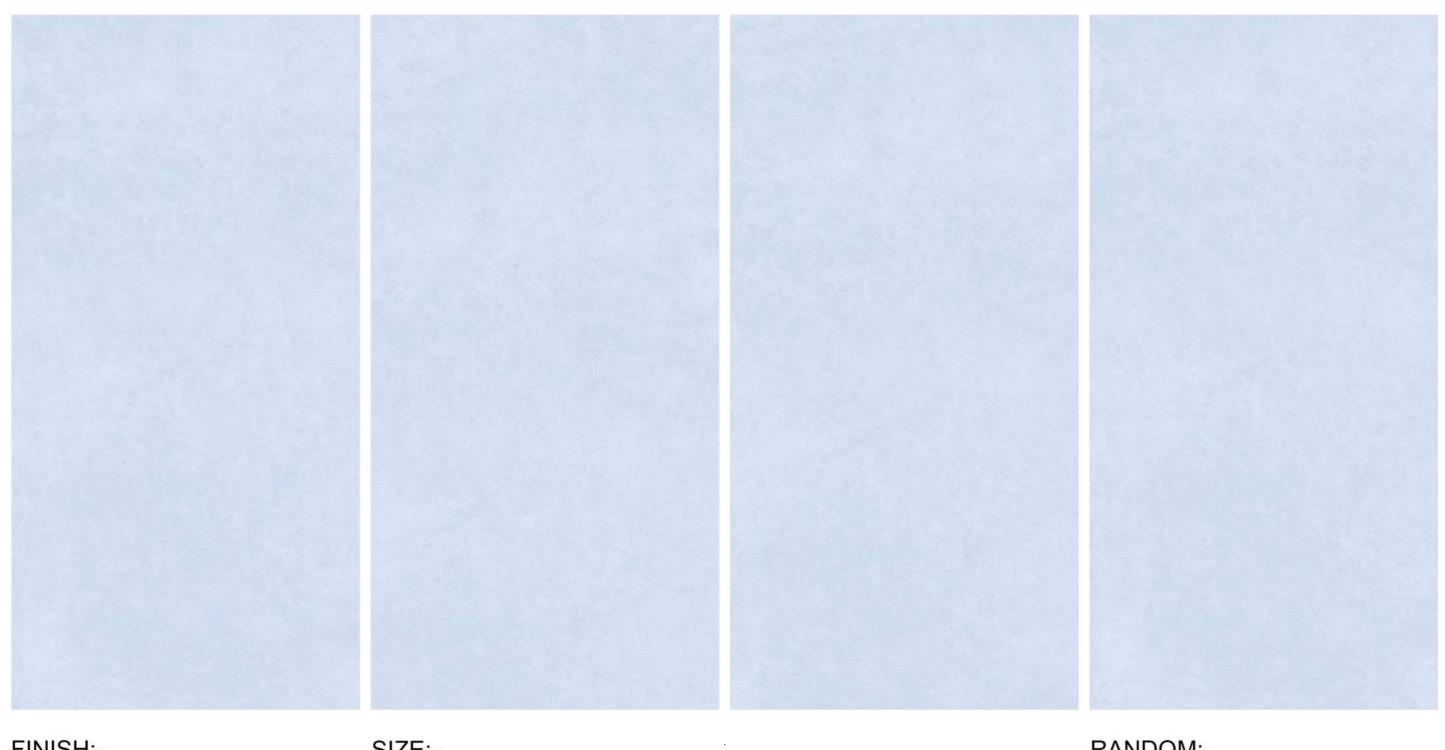

FINISH:-Glossy SIZE:-600X1200 MM



SAND TAUPE

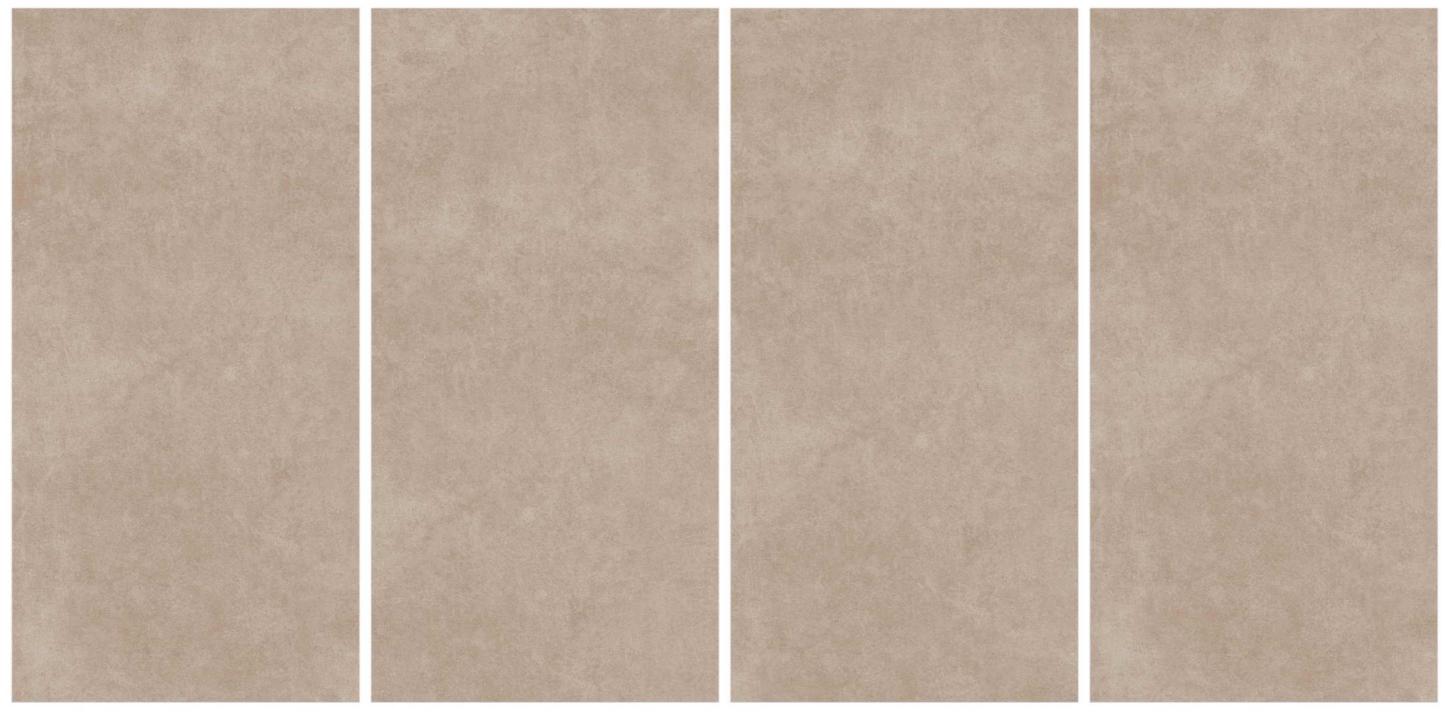


FINISH:-Glossy SIZE:-600X1200 MM






SAND TEAL

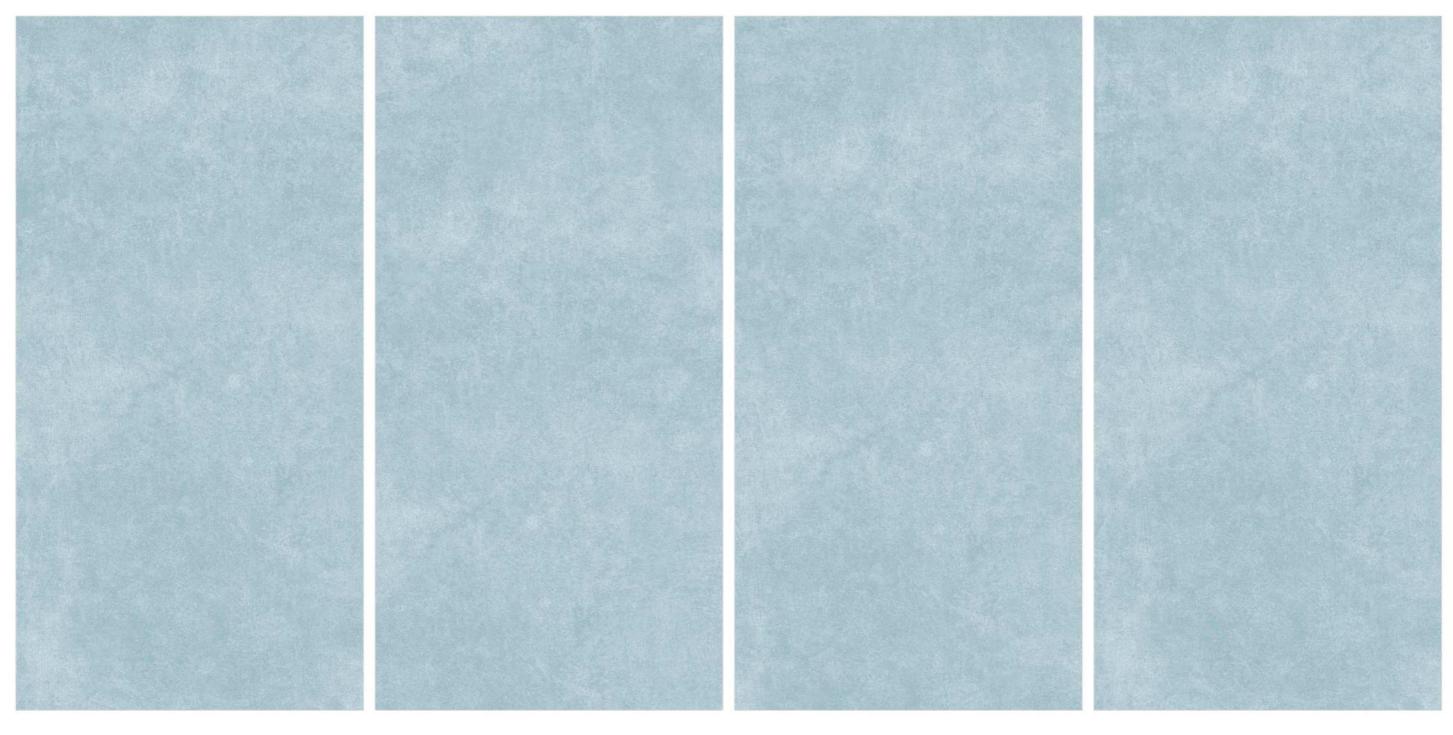

FINISH:-Glossy SIZE:-600X1200 MM



SAND UMBER

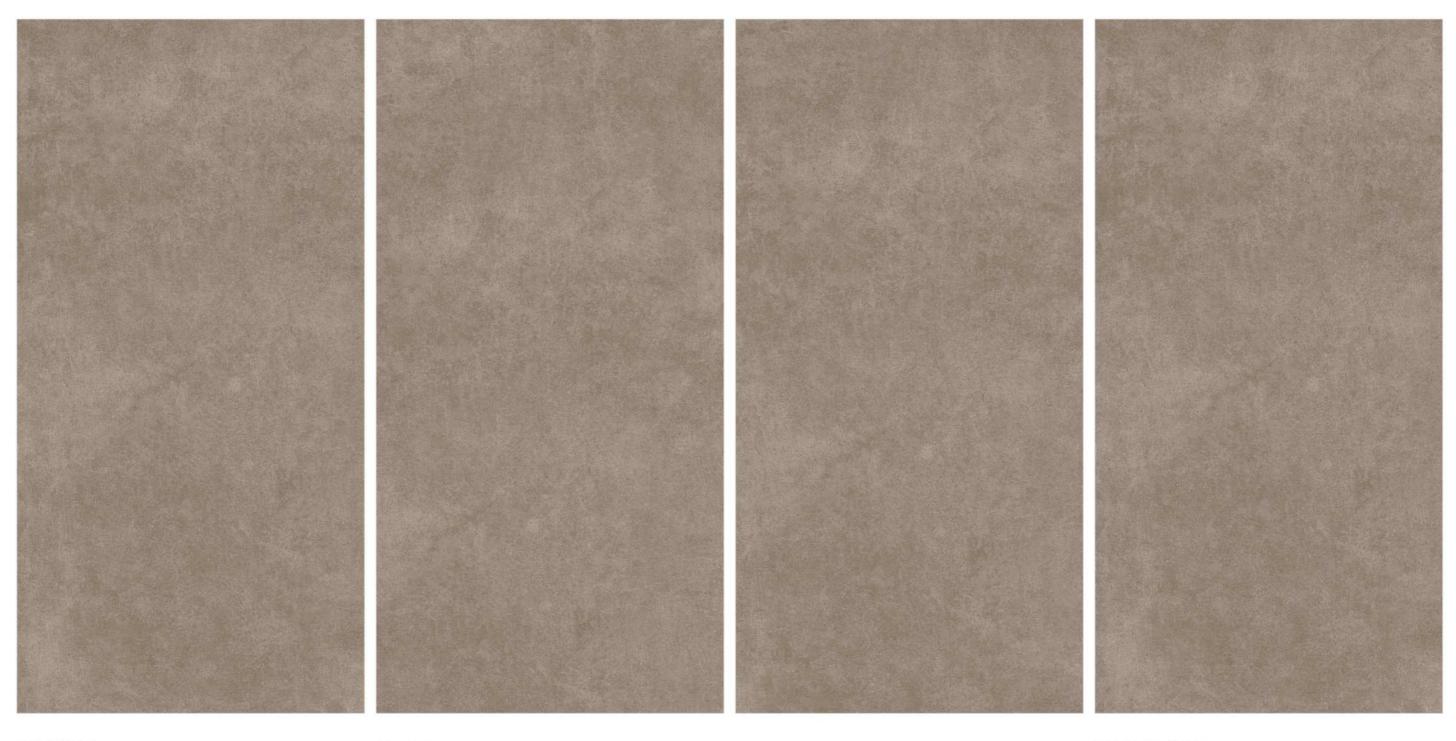

FINISH:-Glossy SIZE:-600X1200 MM





TECHNICAL SPECIFICATION - VITRIFIED TILES- POLISHED

SR	CHARACTERISTIC	International Std. ISO 13006/Group Bla	Specification of Coverstone	Method of Testing
1	Length	±0.3%	±0.1%	ISO 10545-2
2	Length	±5%	±5%	ISO 10545-2
3	Straightness of Sides	±0.3%	±0.1%	ISO 10545-2
4	Rectangularity	±0.3%	±0.1%	ISO 10545-2
5	Surface Flatness	±0.4%	±0.1%	ISO 10545-2
6	Glossiness	Declared by manufacturer	pol-92~100%	ISO 2813(Gloss meter)
7	Water Absorption	E≤ 0.5 %	≤ 0.5 %	ISO 10545-3
8	MOH's Hardness	≥ 5	≥ 5 %	IS13630-13
9	Abrasion Resistance	Declared by manufacturer	PEI 3	ISO 10545-7
10	Flexural Strength (MOR)	≥ 35 N/mm2 (350 Kg/cm2)	≥ 40 N/mm2 (400 Kg/ cm2)	ISO 10545-4
11	Breaking strength	1300 Netwton	1800 Netwton	ISO 10545-4
12	Density	≥ 2.0 gm/cc	> 2.3 gm/cc	DIN 51082
13	Thermal Shock Resistance	Resistant to 10 cycles	pass min 10 cycles	ISO 10545-9
14	Crazing Resistance	In conformity with the norms	Passed min 4 cycles at 7.5 kg /cm2/168° C	ISO 10545 - 11
15	Chemical Resistance HOUSEHOLD CHEMICALS & SWIMMING POOL SALTS	Min class- GB	confirm to classes-GA	ISO 10545 - 13
16	Chemical Resistance LOW CONCENTRATIONS ACIDS & ALKALIS	Min class- GLB	confirm to classes-GA	ISO 10545 - 13
17	Chemical Resistance HIGH CONCENTRATIONS ACIDS & ALKALIS	Min class- GHB	confirm to classes-GHA	ISO 10545 - 13
18	Stain Resistance	Min class- 3	min confirm to classes-3	ISO 10545 - 14

Packing Details

Dimension	Thickness (mm)	Pcs. / Box	Sq.Mtr. /Box	Weight / Box (Kgs)
600x1200mm	8	2	1.44	27

